# Product information sheet LINUS-S-F

Item no. 514023

## Benefits



- Suitable for installation beneath window
- Minimalist design
- Simple to operate: lift straight up and lay on one side
- High spout for easy filling of pans and vases
- Extendable spray head
- Minimum clearance between sink and window sash 4.5 cm

## Colours



brass chrome

Available colours:
chrome

## Planning information


- *Minimum clearance between sink and window sash 4.5 cm.
- For ND version with flow rate control to protect the boiler.
- Optionally available:
- Aerator set with clear spray and aerated spray for high-pressure mixer taps incl. service key

## Scope of supply


- 140° swivel spout for greater reach
- Ø 35 mm tap hole required
- With ceramic disk cartridge
- Patented jet regulator for markedly reduced scaling
- Spray made of metal
- Metal-sheathed spray hose
- BLANCO hose weight for extended reach
- Flexible connector pipes, 950 mm long and ⅜'' nut
- Stabilisation plate to increase the stability of the tap when fitted in stainless steel sinks
- With non-return valve and thus guaranteed against reflux in accordance with EN 1717

## Details


| | |
|---|---|
| Flow rate | 9.6 l |
| Swivel range | 140 ° |

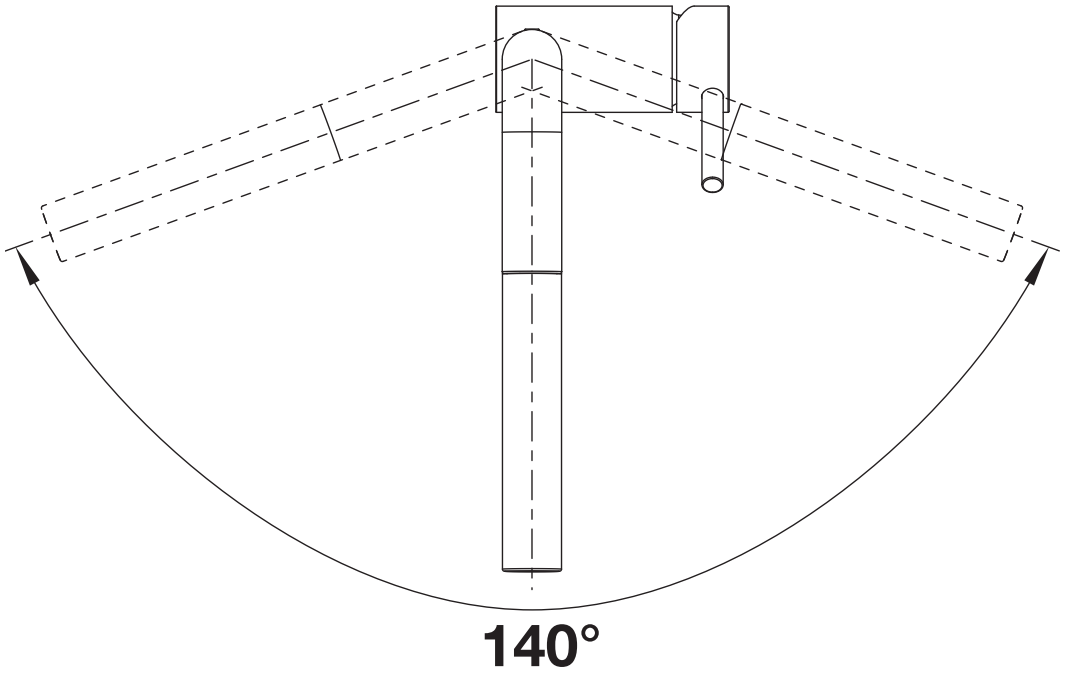


Swivel range

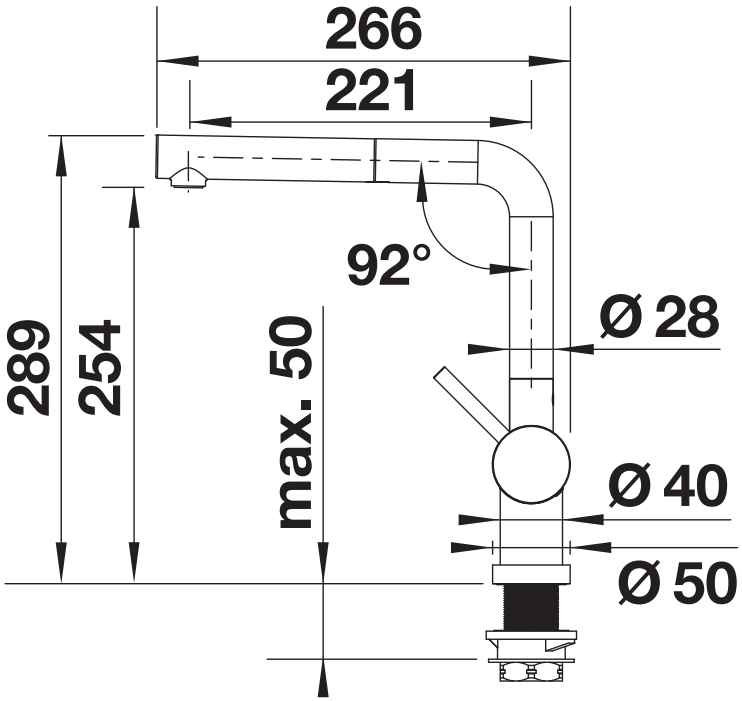


Side view

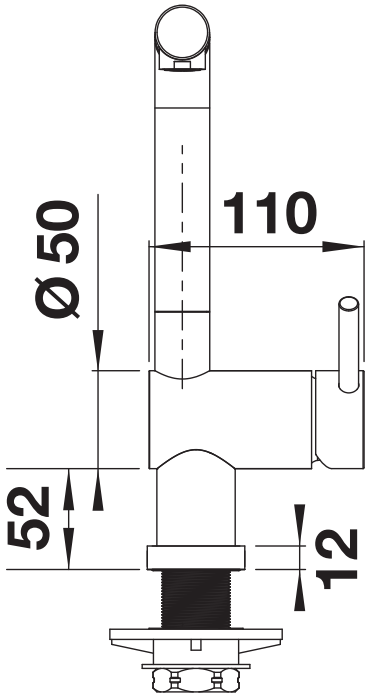


Side view lever