Product information sheet KANO-S-F Vario

Item no. 527969

Benefits



- Suitable for installation beneath window
- Slim tap in aesthetic design
- Pull-out spray hose with dual spray pattern for added reach and convenience
- Especially suitable for compact sinks
- Spout can be swivelled through 120° for greater reach

Colours



Available colours:
chrome

brass chrome

Planning information


- Minimum clearance between sink and window sash 4.5 cm

Scope of supply


- 120° swivel spout for greater reach
- Ø 35 mm tap hole required
- With ceramic disk cartridge
- Patented jet regulator for markedly reduced scaling
- Spray made of plastic
- Nylon-sheathed spray hose
- Hose weight for reliable retraction
- Flexible connector pipes, 950 mm long and ⅜'' nut
- Stabilisation plate to increase the stability of the tap when fitted in stainless steel sinks
- With non-return valve and thus guaranteed against reflux in accordance with EN 1717

Details


Flow rate	7.69 l
Swivel range	120 °

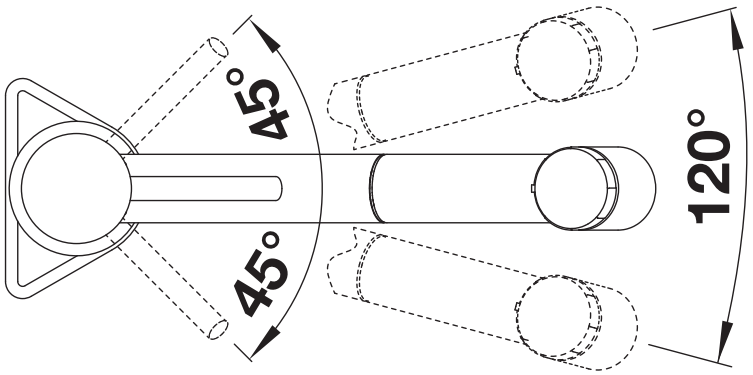

Swivel range

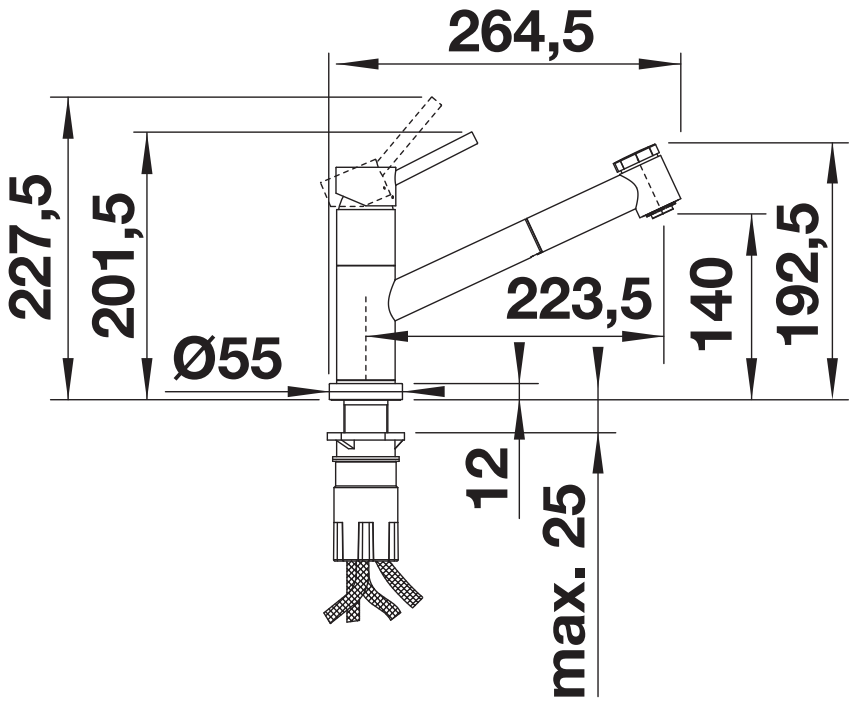

Side view

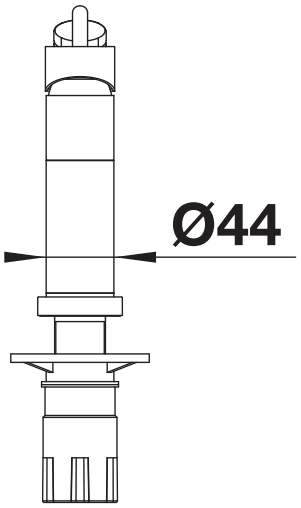

Side view lever