# Product information sheet LUNEOO-S

Item no. 527976

## Benefits



- Tap design reimagined: the mobile spray head is attached to a slim pillar. The water volume and temperature are selected via the separate control panel.
- The spray head allows unlimited operating radius as the hose has a length of 47 cm
- The dual spray head can switch between laminar flow and powerful shower spray and is securely attached with a magnetic holder.
- The control panel can be flexibly placed, e.g., for left- or right-handed usage, behind or beside or in-front of the sink, and even the installation in the cabinet front is possible
- Easy to handle even with wet fingertips: touch for on/off, one turn for volume and another turn for temperature
- For all countertop materials, ideally with a depth of more than 65 cm
- Perfect for kitchen islands. For installation under wall cabinets, there should be around 60 cm of space between the worktop and the underside of the wall cabinets.
- Suitable for every standard water and power connection. Comes with a universal power supply for 100 – 240 V and all plug types.
- Every LUNEOO comes with two different base plates for the remote control. One with an additional hole for a BLANCO drain remote control and one without. We recommend the BLANCO PushControl.
- Available in brushed stainless steel, satin gold, satin platinum, satin dark steel and black matt. And the clue: you can get drainage components (e.g., overflow cap) and soap dispensers in the same colour for your BLANCO sink. Our OOVALON sink comes with a colour matching top grid.
- It offers the highest safety and drinking quality standards and is certified by the most important global authorities (incl. ACS, CE, DVGW).

## Colours



Stainless steel satin platinum

Available colours:

satin dark steel
satin platinum
satin gold

## Planning information


- Not suitable for the installation on sinks and bowls with a tap ledge. The tap can be installed on a standard worktop depth of 650mm, however a worktop depth of 700mm is recommended. Please follow the installation instructions for the cut-outs for the control and tap carefully, as these are not in line with each other.

## Scope of supply


- 360° swivel spout for greater reach
- 1-2 x 35 mm Ø tap holes and 50 mm Ø tap holes required for tap and tap control
- Easy and fast professional installation with BLANCOLock
- Prepared for connection from 100V to 240V with mains unit
- Battery backup and batteries included
- With electronic control and valve box
- Clear stream aerator
- Spray made of metal
- Pull-down, dual spray
- Nylon-sheathed spray hose
- Flexible connector pipes, 700 mm long and ⅜'' nut
- With non-return valve and thus guaranteed against reflux in accordance with EN 1717

## Details


| | |
|---|---|
| Flow rate | 9.6 l |
| Swivel range | 360 ° |

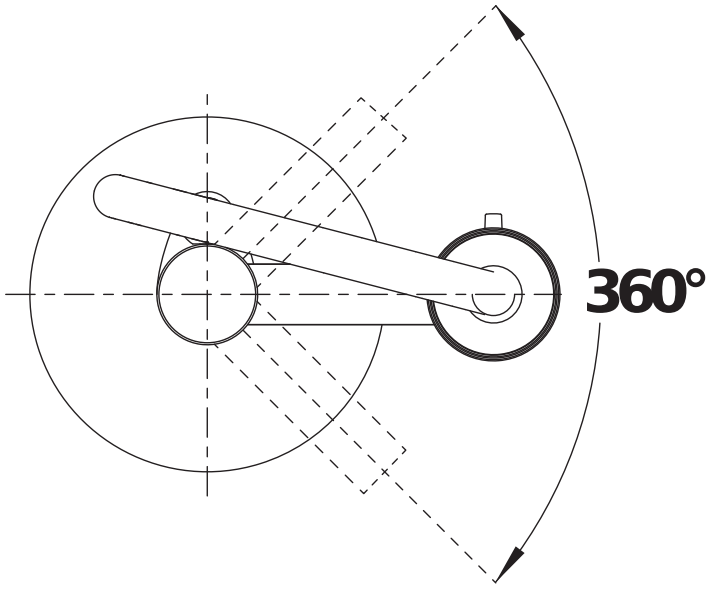


Swivel range

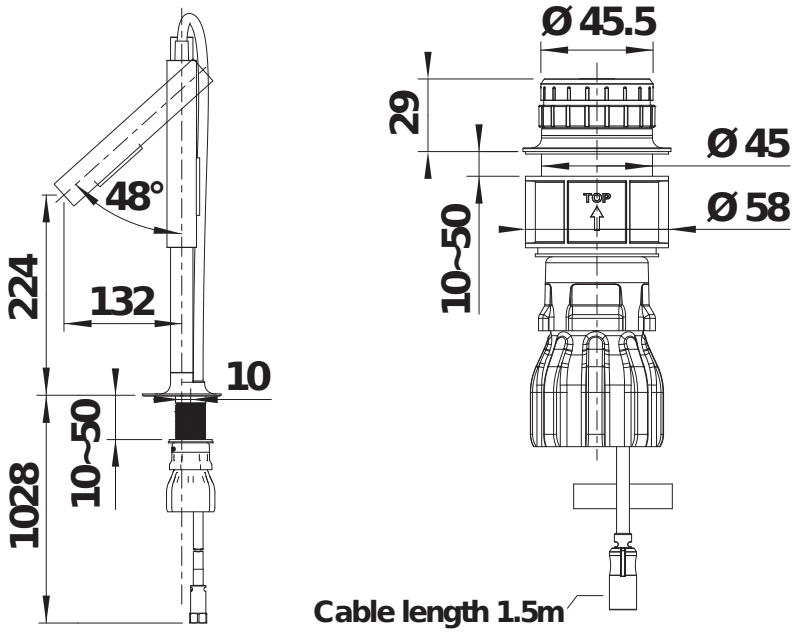


Side view

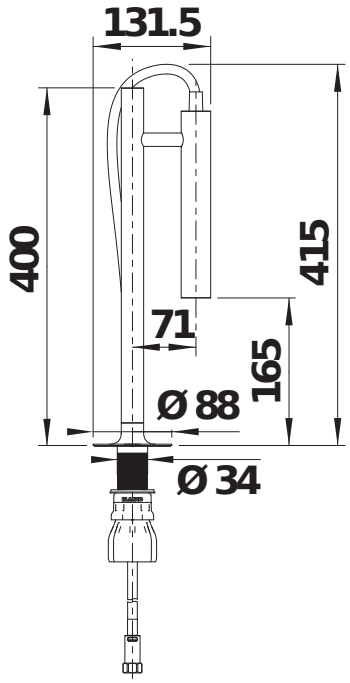


Side view lever